(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 August 2002 (08.08.2002)

PCT

(10) International Publication Number
WO 02/061236 A1

(51) International Patent Classification[7]: E21B 21/10, 34/14

(21) International Application Number: PCT/GB02/00083

(22) International Filing Date: 11 January 2002 (11.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0102485.0 31 January 2001 (31.01.2001) GB

(71) Applicant *(for all designated States except US)*: **SPS-AFOS GROUP LIMITED** [GB/GB]; Arnhall Business Park, Westhill, Aberdeen AB32 6TQ (GB).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **HOWLETT, Paul, David** [GB/GB]; 234 North Deeside Road, Cults, Aberdeen AB15 9PB (GB). **TELFER, George** [GB/GB]; 19 Grosvenor Place, Aberdeen AB25 2RE (GB).

(74) Agent: **KENNEDYS PATENT AGENCY LIMITED**; Floor 5, Queens House, 29 St. Vincent Place, Glasgow G1 2DT (GB).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: DOWNHOLE CIRCULATION VALVE OPERATED BY DROPPING BALLS

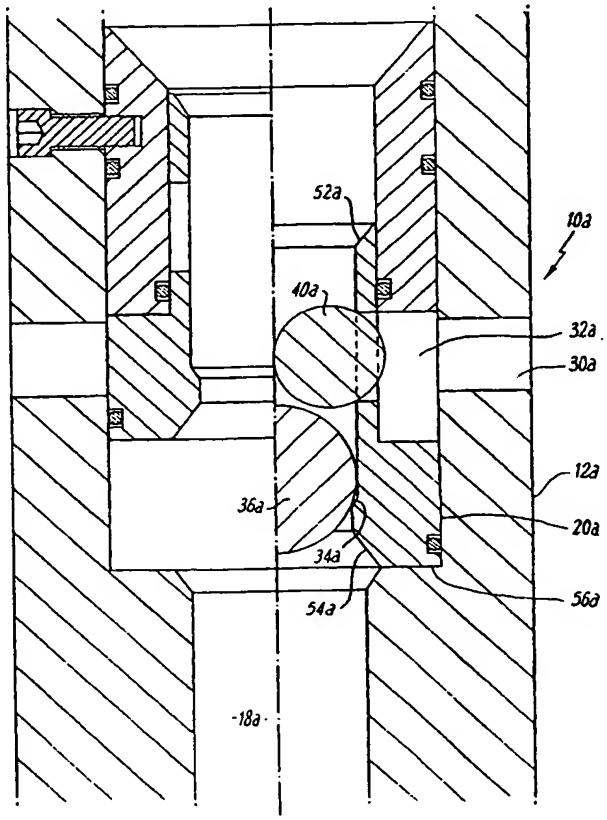

(57) Abstract: A downhole tool (10) for selectively circulating fluid in a borehole is disclosed. The tool operates via the use of a combination of deformable drop balls (36) and smaller hard drop balls (40). In use a deformable drop ball (36) moves a sleeve (20) exposing a radial port (30,32) to provide fluid circulation radially from the tool. The smaller drop ball (40) can then obstruct the radial port (32,30) and by the increased pressure the deformable drop ball (36) is extruded through the tool. The resulting pressure differential as the drop ball (36) moves causes the sleeve (20) to rise, releasing the smaller drop (40) ball and closing the radial port (32,30). The process can be repeated to selectively circulate fluid through the tool.

WO 02/061236 A1

European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
with international search report

before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DOWNHOLE CIRCULATION VALVE OPERATED BY DROPPING BALLS

Downhole Tool

This invention relates to apparatus and method for circulating fluid in a borehole.

It is known that this operation can be achieved by employing a downhole tool connected on a drill string. The tool includes means for circulating fluid through the length of the drill string and also redirecting the fluid at higher flow rates out of the drill string onto the walls of the borehole.

Such tools are of at least two generic types. One type of tool is a weight-set tool. Such a tool comprises a tubular assembly connected to the drill string and includes a general axial fluid outlet, a generally transversed fluid outlet and an obturating member which is moveable between a first position and a second position at which the transverse fluid outlet is open. The obturating member is moved relative to the tubular assembly by extending or collapsing the tool, the latter movement occurring by causing a shoulder coupled to the obturating member to engage with a formation in the

borehole. Such tools have the disadvantage that they require contact to a formation within the borehole, thus a ledge or formation must exist within the borehole.

A second type of circulation tool utilises the well known practice of dropping spherical balls or darts down the drill string to open or close valves, thereby alternating the circulation paths of fluid. The main disadvantage of these tools is that it is difficult to control both axial and radial fluid flow from a single spherical ball. There is also known difficulties in achieving release of the ball so that axial fluid may be established through the drill string.

An object of the present invention is to provide an improved downhole tool for fluid circulation, which obviates or at least mitigates some of the disadvantages of the prior art.

A further object of the present invention is to provide an improved downhole tool for fluid circulation which can be repeatably operated downhole.

A yet further object of the present invention is to provide an improved downhole tool for fluid circulation which is operated by fluid pressure and does not require the incorporation of springs.

According to a first aspect of the present invention there is provided a downhole tool for circulating fluid within a borehole, the tool comprising:

a tubular assembly having an axial through passage

between an inlet and a first outlet, a second outlet extending generally transversely from the tubular assembly and the through passage including a lower ball retaining means;

an obturating member including an upper ball retaining means, the obturating member being moveable relative to the tubular assembly between a first position closing the second outlet and a second position at which the second outlet is open; and

first ball means being retainable within said upper and said lower ball retaining means to prevent fluid flow between the inlet and first outlet and the first ball means being deformable under increased fluid pressure to pass through said upper and said lower ball retaining means.

Preferably the tool further includes second ball means wherein the second ball means is of a size which when located in the second outlet prevents fluid flow therethrough.

Preferably the ball means is a spherical drop ball. More preferably the first ball means has a larger diameter than the second ball means.

Preferably also the first ball means is made from an extrudable material, such as a plastic or phenolic material.

Preferably the second ball means is made from a hard material, such as steel or the like.

Preferably the upper and lower ball retaining means is a generally circular shoulder or ledge. Thus the first ball means seats on the ball retaining means preventing fluid flow between the inlet and first outlet. When fluid pressure increases the first ball means is extruded by deforming through the ball retaining means.

Preferably the obturating member is a sleeve. More preferably the sleeve includes a radial port.

Additionally the sleeve may be coupled to a collet. The collet allows the sleeve to be releasably engaged to the tubular assembly. The collet also allows the radial port to remain aligned with the second outlet by preventing the sleeve from turning within the tubular assembly.

Preferably the tool further includes catching means for catching the ball means once they have passed through the ball retaining means. Such a catching means allows the balls to be collected and returned from the well once the tool has finished its operations.

According to a further aspect of the present invention, there is provided a method of circulating fluid in a borehole comprising the steps of:

(a) connecting a downhole tool, according to the first aspect of the present invention, in a drill string suspended in the borehole;

(b) establishing fluid flow through the axial through passage of the tool;

(c) releasing the first ball means into the axial through passage to seat in the upper ball retaining means thereby obstructing the axial fluid flow through the tool;

(d) moving the obturating member by the increase of fluid pressure against the first ball means to locate the radial port with the second outlet thereby allowing fluid flow through the second outlet;

(e) releasing the second ball means from the surface, such that the second ball means locates in the radial port thereby obstructing the fluid flow through the second outlet;

(f) forcing the first ball means passed the upper ball retaining means by the increase in pressure so as to locate the first ball means in the lower ball retaining means, the first ball means falling a distance comparatively short enough to ensure sufficient pressure to move the obturating member back up the tubular assembly thereby closing the radial port and releasing the second ball means; and

(g) allowing the fluid pressure to increase to a sufficient pressure to cause the first ball means to pass through the lower ball retaining means and the second ball means to follow therethrough and allow axial fluid flow to be re-established.

Preferably the method also includes catching the ball

means in a catching means at the bottom of the tool.

An advantage of the method of the present invention is that the steps may be repeated any number of times to provide circulation of fluid through the tool.

In order to provide a better understanding of the invention, embodiments will now be described, by way of example only, with reference to the following Figures, in which:

Figures 1 through 4 are sequential part cross-sectional views through a downhole tool according to a first embodiment of the present invention; and

Figure 5 is a part cross-sectional view through a downhole tool according to a second embodiment of the present invention.

Referring initially to Figure 1, there is a shown a top section of a downhole tool, termed a circulating tool and generally referred to by reference numeral 10, according to a first embodiment of the present invention. The circulating tool 10 comprises a tubular assembly 12 having a first end 14 including a screw thread connection 16 to connect the circulating tool 10 to a drill string (not shown). Tubular assembly 12 includes an axial through passage 18. When located in a borehole the tool section shown in Figure 1 is closest to the surface.

Reference is now made to Figure 2 of the drawings which depicts a further section of the circulating tool 10 in a downward direction from the surface. Inside tubular

assembly 12 is located the obturating member 20 in the form of a sleeve 20. Sleeve 20 is coupled to a collet 22 which is slidable against an inner sleeve 24 of the tubular assembly 12. Inner sleeve 24 is held in place by a retaining pin or grub screw 26. Collet 22 can move longitudinally against inner sleeve 24, and can releasably engage in circular recess 28. Sleeve 20, inner sleeve 24 and the outer wall of the tubular assembly 12 are each provided with sealing means in the form of o-rings to prevent the ingress of fluid therebetween.

Reference is now made to figure 3 of the drawings which depicts a further section of the circulation tool 10. In this embodiment sleeve 20 includes port 32 which when sleeve 20 is in an open position aligns with a radial port 30 in the tubular assembly 12. In this open position sleeve 20 is located against shoulder 38 of tubular assembly 12. A first spherical ball 36 is located against a shoulder 34 of the sleeve 20 which retains the ball 36 as fluid flows via ports 30 and 32. A second spherical ball 40 is shown located in port 30 thereby closing the fluid flow radially from the tool 10. It will be apparent that when collet 22 is located in recess 28 the sleeve 20 is in the closed position, obturating the outlet port 30.

In tubular assembly 12 there is also located seat 42 which is of a diameter sufficient to retain ball 36. When ball 36 is extruded through seat 42 it is caught in catcher 44 and prevented from flowing through the drill string by the peg 46. Ball 40 can pass cleanly through seats 34,42 and will come to rest in the ball catcher 44.

Reference is now made to figure 4 of the drawings which illustrates ball catcher 44 including balls 36a,b and 40a,b. It will be appreciated that the location of pin 46 will determine how many balls may be retained in the ball catcher 44. The location of the balls 36a,b 40a,b does not obstruct fluid flow through axial through passage 18 and out of first outlet 48. Outlet 48 includes connection means 50 in the form of a screw thread for connecting the circulation tool 10 to a further downhole drill string(not shown).

In use, tool 10 is attached in a drill string with the sleeve 20 held in the closed position which obturates outlet port 30. The sleeve 20 is held in this closed position by the location of collet 22 in recess 28.

To operate the tool 10, ball 36 is dropped down the axial through passage in the fluid flow and comes to rest against shoulder 34. Ball 36 seals against shoulder 34 and blocks fluid flow through the tool 10. The fluid pressure pushes ball 36 and consequently sleeve 20 in the axial direction of fluid flow through passage 18. Sleeve 20 comes to rest against shoulder 38 and radial port 32 is aligned with the outlet port 30. Fluid flow is now radially from the tool via port 30. This radial flow can be of high pressure as the port 30 may be of a small diameter or be shaped as a jet (not shown).

When the radial fluid flow is required to be stopped a second ball 40 is dropped into the passage 18 at the surface. Ball 40 is carried in the fluid and forced against port 32 thereby sealing the radial port 30. Ball 40 is made of steel to withstand the downhole pressure

exerted upon it. However, the consequential increase in fluid pressure in the passage 18 causes ball 36, which is made of a deformable plastic, to be extruded through the seat 34. Ball 36 is then forced against lower seat 42 and because the distance between the seats 34 and 42 is relatively small, i.e. approximately 6 inches for ball diameters of 2 inches and 1.75 inches and inner passage diameter of 3.75 inches, the resulting pressure differential at the base of the sleeve 20 causes the sleeve 20 to move upwards to the closed position. As the sleeve 20 moves upwards ball 40 is released into the axial fluid flow and falls through seat 34.

With radial port 30 now closed, all fluid pressure is substantially against ball 36 and the ball 36 is extruded by deforming through the seat 42 and falls into the ball catcher 44. Ball 36 is held within the ball catcher 44 be the retaining pin 46. Ball 40 falls through seat 42 and is also held within the ball catcher 44.

If radial flow is required again the above procedure may be repeated without the need for removing the tool 10 from the borehole. This procedure may be repeated until the ball catcher is full whereby the tool is returned to the surface for the catcher 44 to be emptied.

Reference is now made to Figure 5 of the drawings which depicts a section of the circulation tool 10a in accordance with a second embodiment of the present invention. Like parts to those of Figures 1 to 4 have been given the same numerals but are suffixed "a". Tool 10a works in an identical fashion to tool 10 except that collet 22 has been removed. In the second embodiment,

sleeve 20a is arranged such that surface 52 is smaller than surfaces 54 and 56 which ensures that sleeve 20a moves up to and remains in the closed position without the need of the collet 22.

The principal advantage of the present invention is that it may be operated solely by hydraulic pressure of the fluid within the borehole, the tool requires no springs or locking/engaging means to move the obturating member. A further advantage of the present invention is that circulation of the fluid can be selectively started and stopped any of number of times and is only dependent on the available space in the ball catcher mechanism at the base of the tool is used. Thus this removes the need for shearing mechanisms found in other fluid circulating tools.

It will be appreciated by those skilled in the art that various modifications may be made to the present invention without departing from the scope thereof. For example the ball means could equally be darts or any other shaped objects which will travel through the fluid and locate in the ball retaining means.

CLAIMS

1. A downhole tool for circulating fluid within a borehole, the tool comprising:

a tubular assembly having an axial through passage between an inlet and a first outlet, a second outlet extending generally transversely from the tubular assembly and the through passage including a lower ball retaining means;

an obturating member including an upper ball retaining means, the obturating member being moveable relative to the tubular assembly between a first position closing the second outlet and a second position at which the second outlet is open; and

first ball means being retainable within said upper and said lower ball retaining means to prevent fluid flow between the inlet and first outlet and the first ball means being deformable under fluid pressure above a first pressure to pass through said upper and said lower ball retaining means.

2. A downhole tool as claimed in Claim 1 wherein the tool further includes second ball means wherein the second ball means is of a size which when located in the second outlet prevents fluid flow therethrough.

3. A downhole tool as claimed in Claim 1 or Claim 2 wherein the ball means is a spherical drop ball.

4. A downhole tool as claimed in Claim 2 or Claim 3 wherein the first ball means has a larger diameter than the second ball means.

5. A downhole tool as claimed in any preceding Claim wherein also the first ball means is made from an extrudable material, which is deformable under a pressure above the first pressure.

6. A downhole tool as claimed in any of Claims 2 to 5 wherein the second ball means is made from a hard material, which is not deformable.

7. A downhole tool as claimed in any preceding Claim wherein the upper and lower ball retaining means are substantially circular shoulders arranged so that the first ball means seats on the ball retaining means preventing fluid flow between the inlet and first outlet until the first pressure is reached whereupon the first ball means is extruded by deforming through the ball retaining means.

8. A downhole tool as claimed in any preceding Claim wherein the obturating member is a sleeve.

9. A downhole tool as claimed in Claim 8 wherein the sleeve includes a radial port.

10. A downhole tool as claimed in any preceding Claim wherein the obturating member is coupled to a collet so that it is releasably engaged to the tubular assembly.

11. A downhole tool as claimed in Claim 10 when dependent on Claim 9 wherein the radial port remains aligned with the second outlet by virtue of the collet.

12. A downhole tool as claimed in any preceding Claim wherein the tool further includes catching means for catching the ball means once they have passed through the ball retaining means.

13. A method of circulating fluid in a borehole, comprising the steps of:

(a) connecting in a drill string in a borehole, a tubular assembly including an axial through passage and a radial port;

(b) dropping a first ball into the axial through passage to rest within the axial through passage below the radial port thereby causing fluid in the through passage to be directed through the radial port;

(c) dropping a second ball into the axial through passage to rest in the radial port and prevent fluid flow through the tool; and

(d) by increased fluid pressure, moving the first ball in the through passage, the movement of the first ball causing a pressure differential sufficient to move a member, closing the radial port and releasing the second ball into the through passage.

14. A method of circulating fluid in a borehole comprising the steps of:

(a) connecting a down hole tool, according to any one of Claims 9 to 12, in a drill string suspended in the borehole;

(b) establishing fluid flow through the axial through passage of the tool;

(c) releasing the first ball means into the axial through passage to seat in the upper ball retaining means thereby obstructing the axial fluid flow through the tool;

(d) moving the obturating member by the increase of fluid pressure against the first ball means to locate the radial port with the second outlet thereby allowing fluid flow through the second outlet;

(e) releasing the second ball means from the surface, such that the second ball means locates in the radial port thereby obstructing the fluid flow through the second outlet;

(f) forcing the first ball means passed the upper ball retaining means by the increase in pressure so as to locate the first ball means in the lower ball retaining means, the first ball means falling a distance comparatively short enough to ensure sufficient pressure to move the obturating member back up the tubular

assembly thereby closing the radial port and releasing the second ball means; and

(g) allowing the fluid pressure to increase to a sufficient pressure to cause the first ball means to pass through the lower ball retaining means and the second ball means to follow therethrough and allow axial fluid flow to be re-established.

15. A method of circulating fluid in a borehole as claimed in Claim 13 or 14 including the step of catching the ball means in a catching means at the bottom of the tool.

16. A method of circulating fluid in a borehole as claimed in any of Claims 13 to 15 wherein the steps are repeated to provide selected circulation of fluid when the tool is in the borehole.

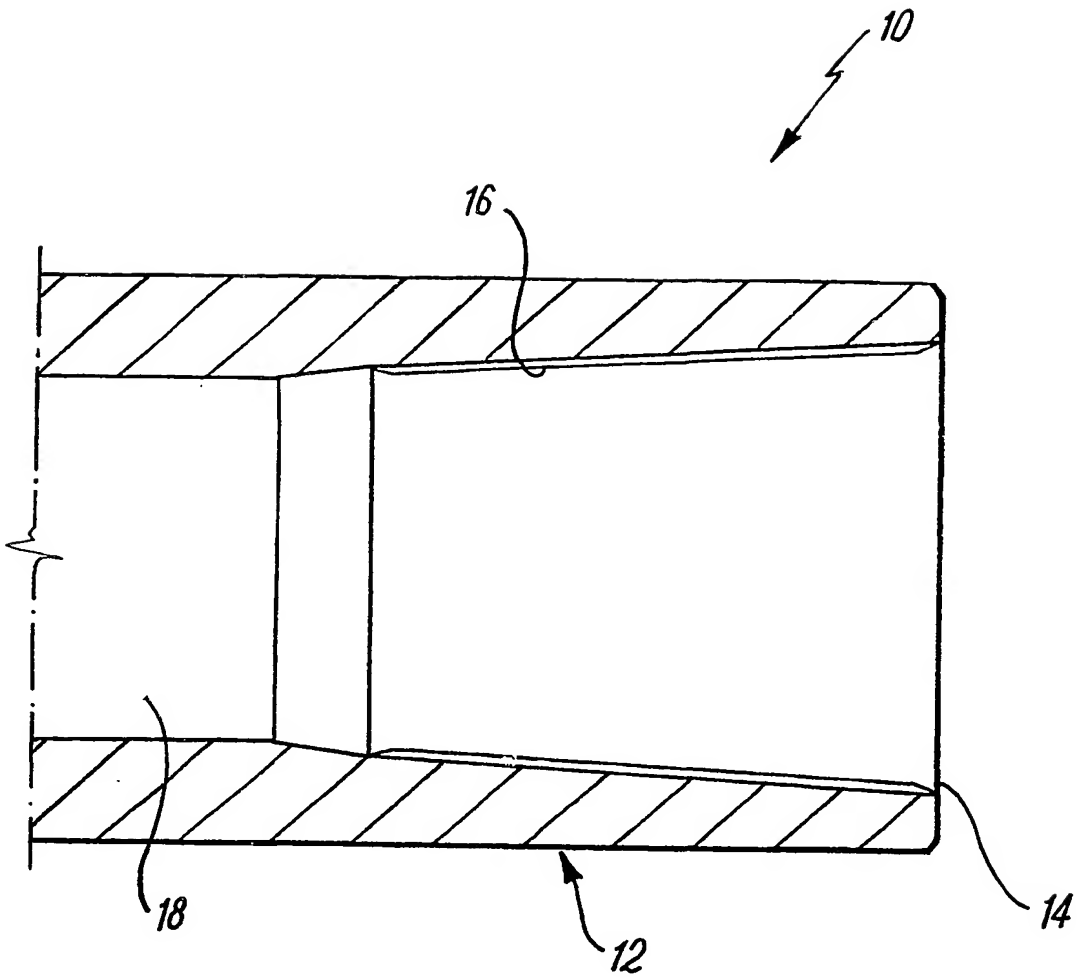

FIG. 1

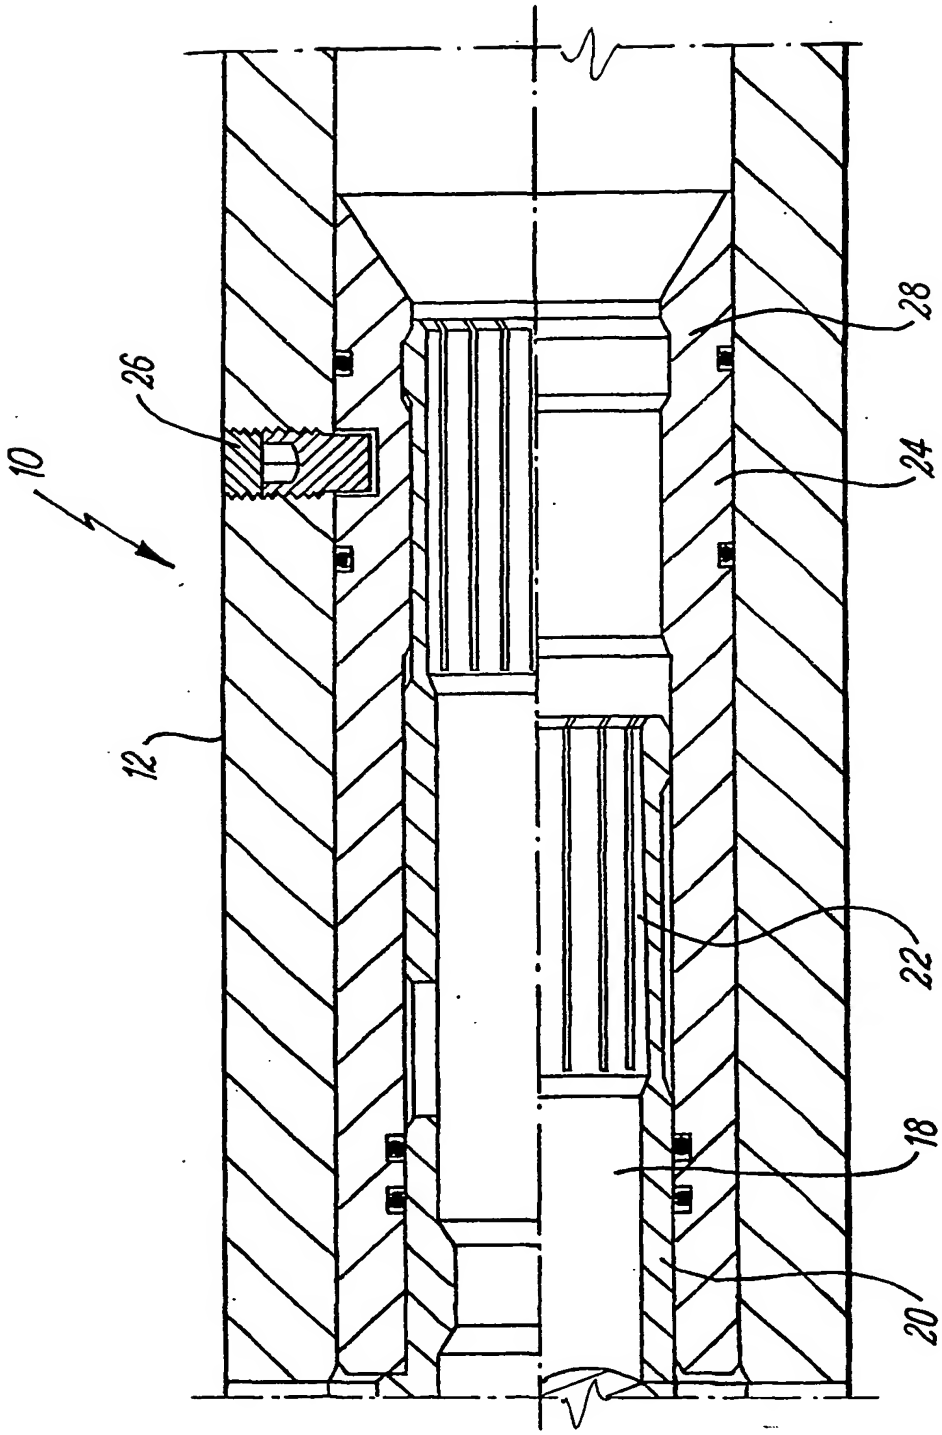

Fig.2

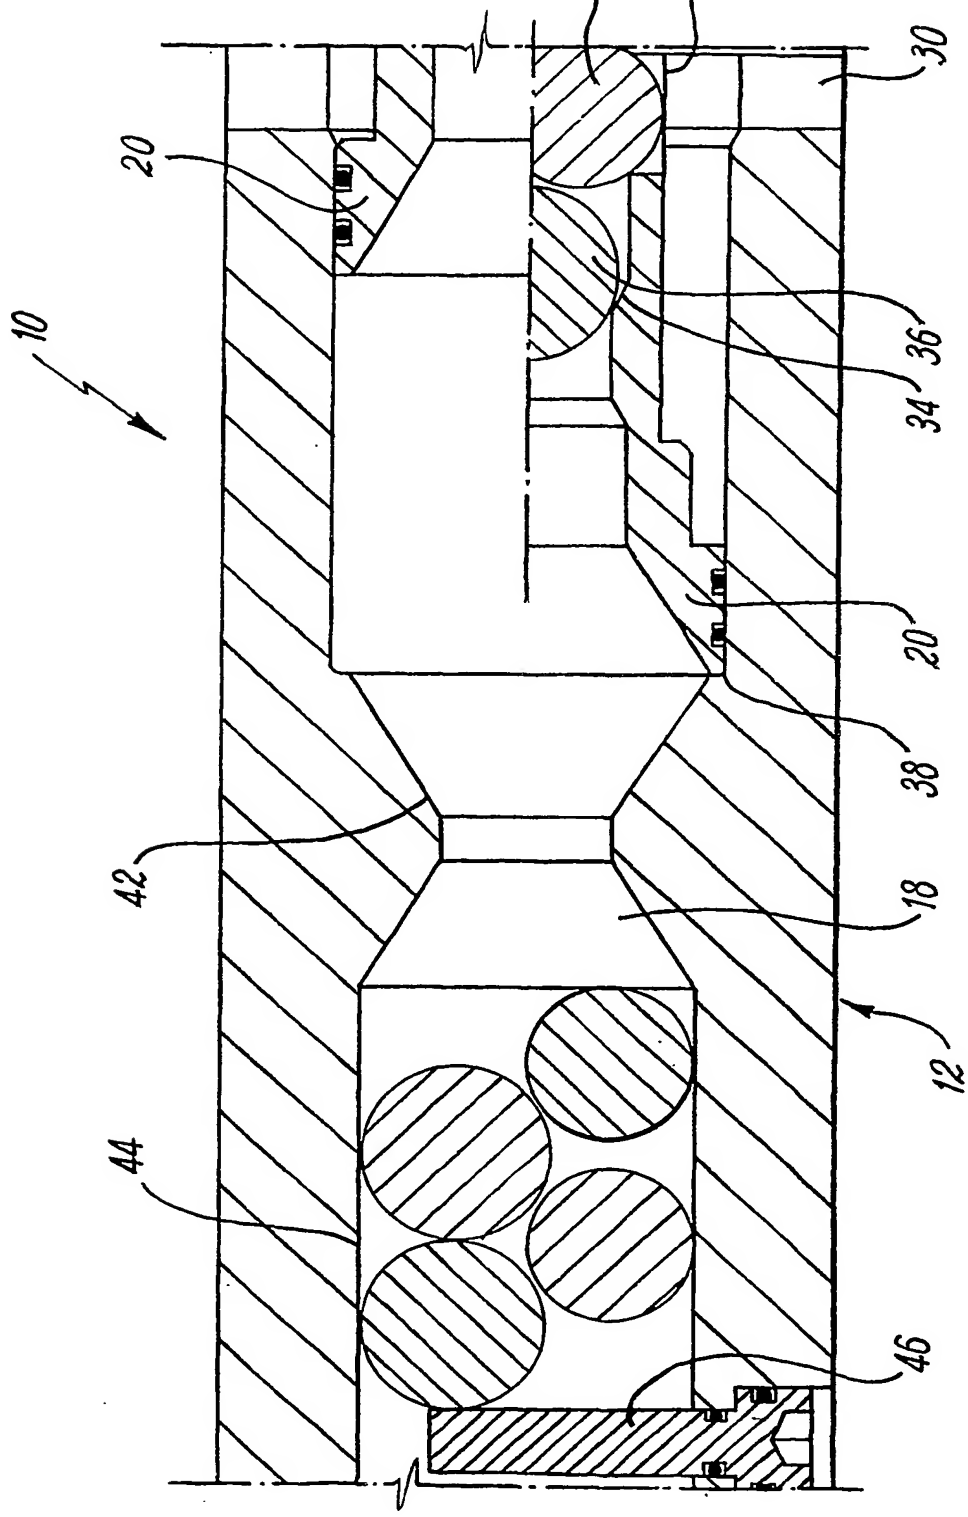

FIG. 3

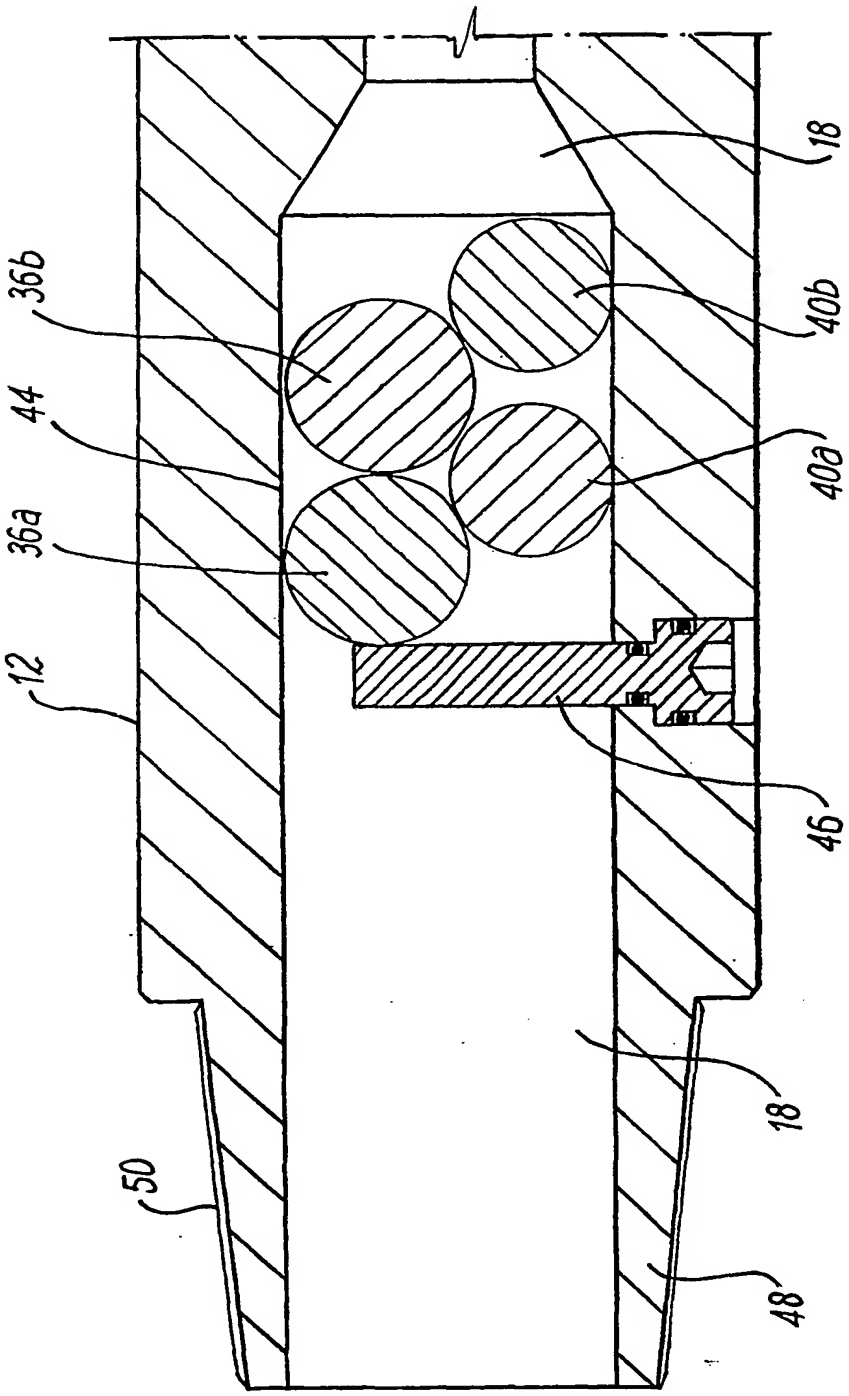

FIG. 4

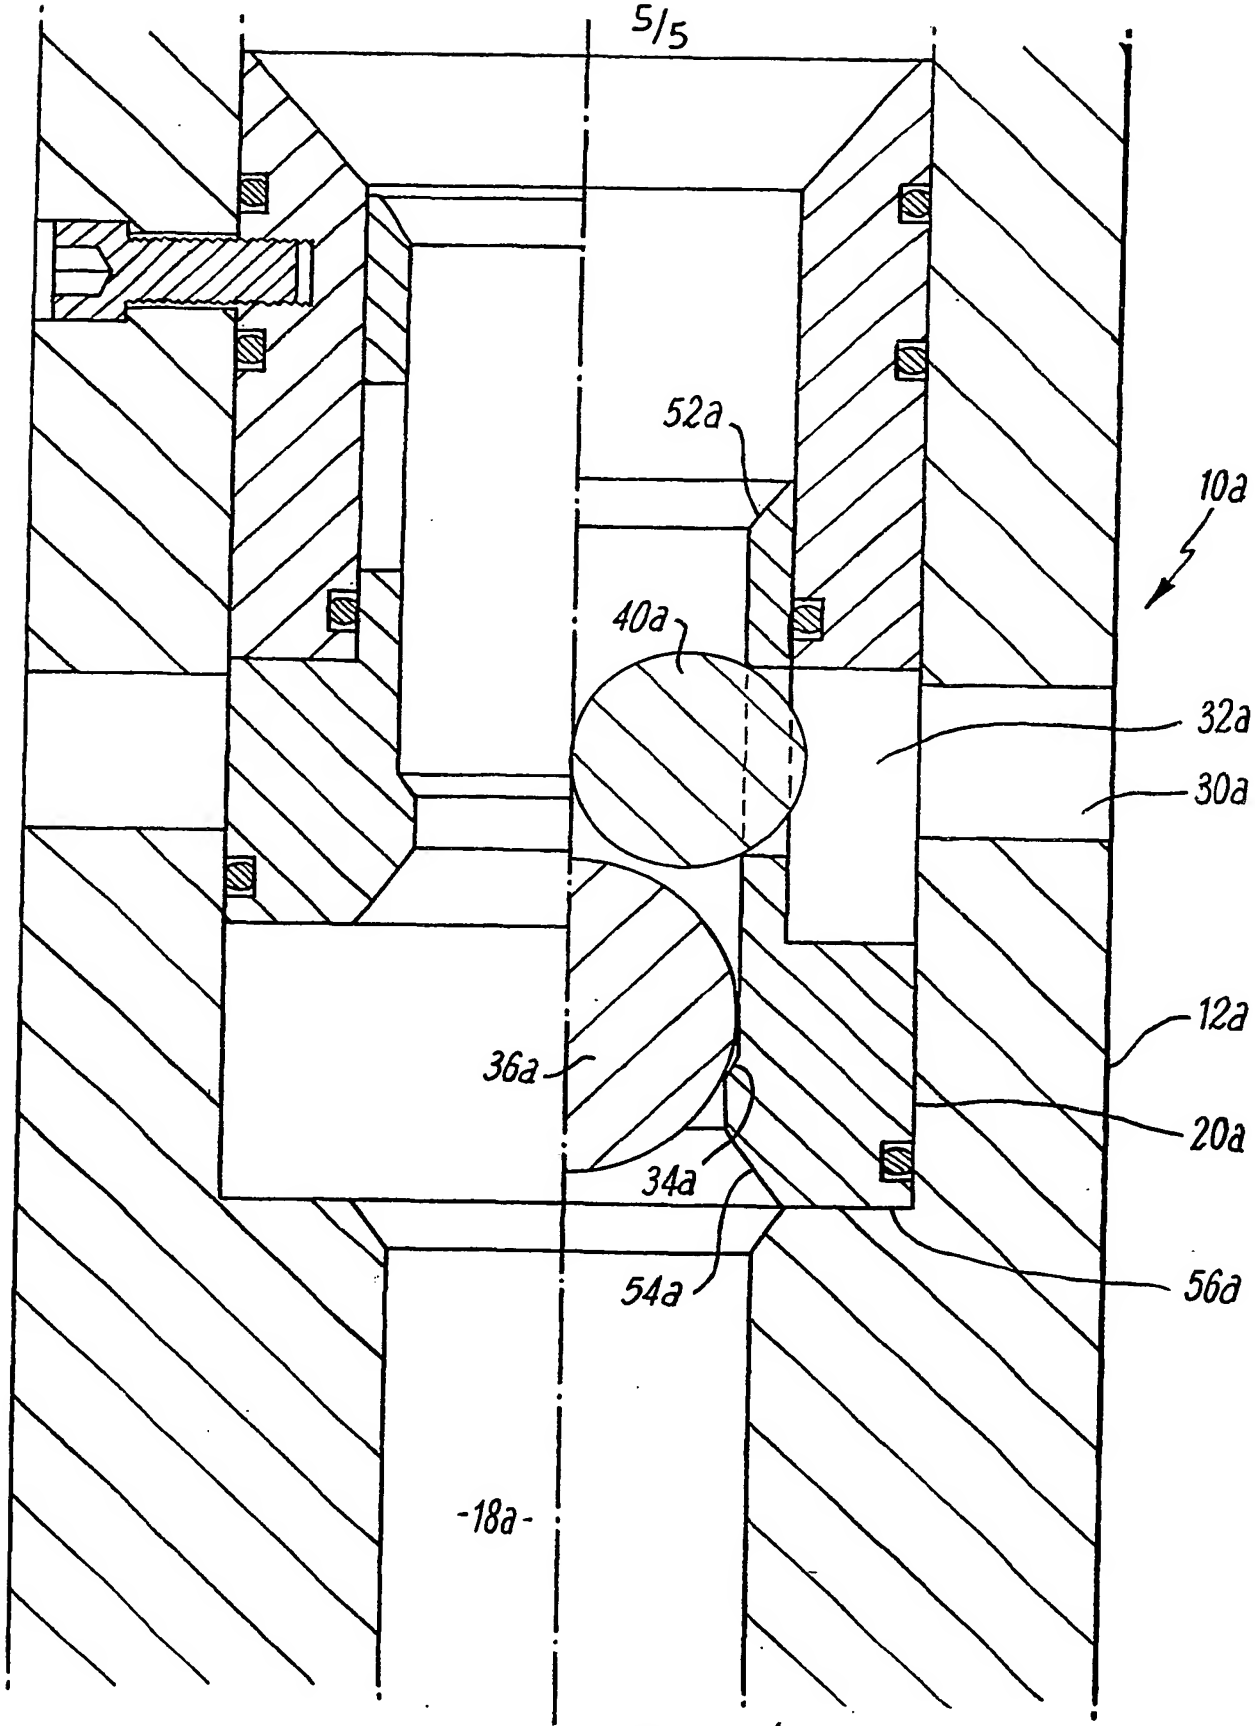

FIG. 5

INTERNATIONAL SEARCH REPORT

ıal Application No
PCT/GB 02/00083

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B21/10 E21B34/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 5 499 687 A (LEE PAUL B) 19 March 1996 (1996-03-19) claims 1-4; figures 1-5 ---	13,15,16 1-9,14
Y	GB 2 341 405 A (SPECIALISED PETROLEUM SERV LTD) 15 March 2000 (2000-03-15) figures 1-6 ---	1-9,14
P,X	WO 01 90529 A (LEE PAUL BERNARD) 29 November 2001 (2001-11-29) page 6, paragraph 1 -page 7, paragraph 3; figures 1-3 ---	13,15
A	US 5 533 571 A (SURJAATMADJA JIM B ET AL) 9 July 1996 (1996-07-09) column 5, line 57 -column 6, line 41; figures 1-4 --- -/--	1

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
30 May 2002	06/06/2002

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	van Berlo, A

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inter nal Application No
PCT/GB 02/00083

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category ˇ	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 268 770 A (LEE PAUL BERNARD) 19 January 1994 (1994-01-19) claims 1,7-12; figures 1-3	1,13-16

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

nal Application No
PCT/GB 02/00083

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5499687 A	19-03-1996	US 4889199 A	26-12-1989
GB 2341405 A	15-03-2000	US 6253861 B1	03-07-2001
WO 0190529 A	29-11-2001	AU 5239901 A WO 0190529 A1	03-12-2001 29-11-2001
US 5533571 A	09-07-1996	NONE	
GB 2268770 A	19-01-1994	CA 2100389 A1	18-01-1994

Form PCT/ISA/210 (patent family annex) (July 1992)